



alfalite®

LED DISPLAYS

SKYPIX® RGBW & IM
series




THE CEILING LED CABINET FOR PROFESSIONALS
IN VP XR, FIML, SERIES, ADVERTISING
AND BROADCAST

www.alfalite.com

WE LIGHT UP VP XR SETS WITH A NEW DIMENSION


RGBW LIGHTING

- RGB Video Playback
- White Led Lighting
- More Natural and Realistic Scene
- Improved Color Temperature and Accuracy
- Lowest Pixel Pitch on the market (5 components)
- APP for Control and Configuration 
- Design your Lighting through the interface
- Control over Color and Intensity
- Control by Pixel or Zone in Real-Time
- Configurable Presets
- Increased Energy Efficiency

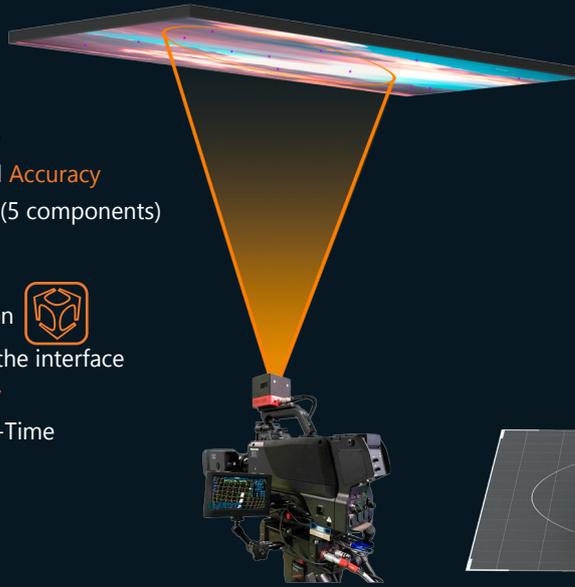

DYNAMIC VIRTUAL STEAKERS

- Dynamic Invisible Marcs (IM)
- Compatible with Market Tracking systems
- Customizable Constellations
- Replaces traditional Marcs
- Requires no Maintenance
- No Synchronization Loss
- Array: Provides Shooting Metadata

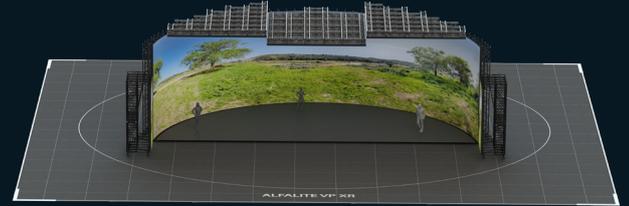

PRODUCT SPECIFICATIONS

ALFALITE SKYPIX® RGBW & IM SERIES

MODEL	SKYPIX RGBW & IM
PIXEL PITCH RGB (mm)	3.9
PANEL RESOLUTION (px)	128 x 128
MODULE RESOLUTION (px)	64 x 64
PANEL SIZE (mm)	500 x 500
RGB BRIGHTNESS (cd/m ²)	6.000 - 9.000
REFRESH RATE (Hz)	7.680
PIXEL PITCH WHITE (mm)	3.9
COLOR TEMPERATURE (°K)	3.200 - 6.504
COLOR RENDERING INDEX	TM-30 (90 Ra)
PIXEL PITCH IM (mm)	3.9
IM WAVE RANGE	Dynamic
AVERAGE CONSUMPTION (W)	35
MAXIMUM CONSUMPTION (W)	90
LIFESPAN (h)	100.000

CERTIFICATIONS   

* Technical specifications can be flexible depending on the project

** CE and FCC Certifications far exceed the standard values



P.I. Doña Paca. C/ Zalema, 2.
21720 Rociana del Condado
Huelva. SPAIN.

Website: www.alfalite.com
info@alfalite.com
Telf. 959 41 73 71



@Alfalite



Alfalite.led



alfalite.led



Alfalite